

**SELAC HOMOLOGATED POLYESTERS FOR ARCHITECTURAL SERIES : Y51 Y52 Y54 Y57 in ANTHERM version**  
 Glossy - Semiglossy - Matt - Metallic and tridimensional effect

**DESCRIPTION**


Thermosetting powder coatings based on carboxylated polyester resins crosslinked with non-toxic hardeners and exempt from any dangerous substances . These formulations are especially designed to fulfill the highest expectations in terms of colour stability , gloss retention and corrosion resistance required by the architectural market . Their excellent aesthetical properties satisfy the highest decorative standards . The application is possible with corona and tribo electrostatic systems . The possibility to apply on porous substrates subject to degassing , as well as the baking in ovens with direct flame without any discoloration problems complete the great applicative flexibility of the series .

**GENERAL PROPERTIES**

Excellent mechanical properties  
 Outstanding resistance to ageing in outdoor environments  
 Very good corrosion resistance  
 Very good aesthetic properties  
 Reduction of the surface temperatures

**TECHNICAL PECULIARITIES**

The **ANTHERM** range is identified by "R" in fourth position and adopts innovative technologies resulting in a higher coefficient TSR ( Total Solar Reflectance ) , index of a superior reflexion of the IR component of sunlight . This peculiarity allows to reduce the temperature on finished goods and limites both mechanical deformation of the support and thermal stress on the on the polymeric matrix , with a benefit on abitative comfort and on durability of the coating .

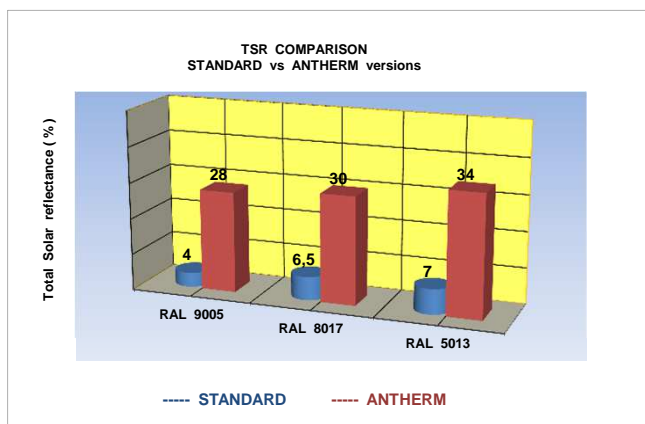

Values are mentioned as a mere indication .

**HOMOLOGATED SERIES AND FINISHES**

- Selac Y51 : Glossy class 1 / category 3  
 Qualicoat license P-0504    GSB license 179A
- Selac Y52 : Semiglossy class 1 / category 2  
 Qualicoat license P-0667    GSB license 179B
- Selac Y54 : Matt class 1 / category 1  
 Qualicoat license P-0649    GSB license 179C
- Selac Y57 : Textured class 1 / category  
 Qualicoat license P-0590

**SELAC HOMOLOGATED POLYESTERS FOR ARCHITECTURAL SERIES : Y51 Y52 Y54 Y57 in ANTHERM version**  
Glossy - Semiglossy - Matt - Metallic and tridimensional effect

**COLOURS AND EFFECTS**


Possibility of a complete colour range  
Gloss range from 20 up to 95 gloss  
Smooth or fine textured finish  
Metallic effects possible in dry-blend or bonded versions  
Salt & pepa and mixcolor ( Reflexion and Pixelite portfolios are available )  
Large range of stock products , in metallic too  
Wide possibility of taylor-made versions on demand

**CURING CONDITIONS**

**Drafts interpretation**

To obtain functional , optical and aesthetic properties mentioned in TDS the curing schedule adopted for the products must be in any point of the draft area comprised between the curves of minimum and maximum .

**Times always refer to object temperature ( PMT )** , being the heating time variable from item to item and from plant to plant .

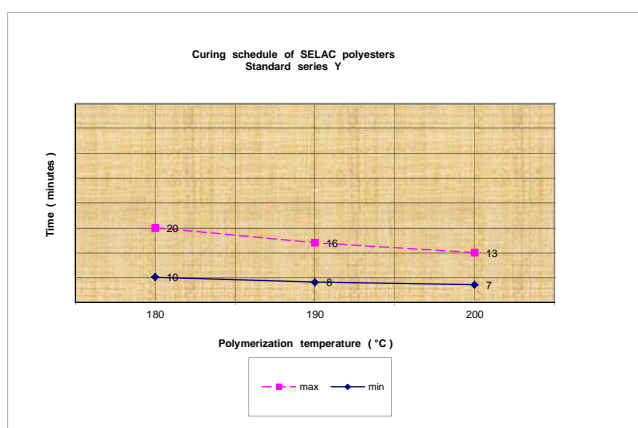

**Minimal conditions ( PMT )**

**10' @ 180°C - 8' @ 190°C - 7' @ 200°C**

**SUPPORT PREPARATION**

Painting must be done on clean support , free from oil , grease , oxidation , residuals of working , welding and rinsing processes , and any contaminating agent must be avoid  
**Iron and steel** : iron or zinc salts phosphatization  
**Aluminium** : cromatation or chrome-free pretreatment are recommended  
**Hot dipping galvanized steel** : according with the item adopt mechanical treatment , phosphatization or chromatation process .

**THICKNESS**

To obtain the best insulating properties of **ANTHERM** polyesters it is mandatory to reach the total hiding of the support , therefore we suggest thickness of at least 80 micron , to be always adjusted according with colour ( in many cases yellow , red and orange colours have intrinsic lower hiding power ) .  
Minimal recommended thickness is 60 microns , but in any case the coating layer must completely cover any surface roughness , especially in case of sandblasted supports .  
For fine textured products the minimal suggested thickness is 80 micron .

**APPLICATION METHODS AND RECYCLE**

The application is possible with manual or automatic electrostatic devices , both corona and tribo .  
Overspray can be recycled in the fresh powder and re-used , but the use of integral recycle is not recommended at all ; do not exceed 25% and maintain a constant feeding of fresh powder .  
On metallic products an indicative ratio is 10% , but an unproper management of the recycle may result in remarkable variations of the effect , therefore it must be evaluated in each single case ; please contact arsonsisi s.p.a. and refer to the technical informative note about application of metallic .

**SELAC HOMOLOGATED POLYESTERS FOR ARCHITECTURAL**

**SERIES : Y51 Y52 Y54 Y57 in ANTHERM version**

Glossy - Semiglossy - Matt - Metallic and tridimensional effect

**TECHNICAL FEATURES**

**Specific gravity** : 1,3 to 1,7 g/cc , according colour and formula

**Theoretical yield at 60 micron** : 13 to 10 sqm/kg  
according colour and formula

**Brilliance range at 60°** : 20 to 95

**Average particle size ( laser Malvern )** : 32 - 45 micron

**X99 particle size ( laser Malvern )** : 95 - 150 micron

**\*\*\*\*\* NOTE** : taylor-made particle size distributions  
are possible on demand

**MECHANICAL  
PROPERTIES**

**Test conditions** : trials are made on normalized UNI 5961 panels 0,6 mm thick ,  
degreased with solvent , coated with 70 - 80 micron of powder  
completely cured .

Mentioned results are obtained under controlled lab conditions ; therefore  
these values are merely indicative and must be confirmed in the actual use  
conditions under the responsibility of each single user .

**Minimal polymerization conditions ( PMT )**

10' @ 180°C - 8' @ 190°C - 7' @ 200°C

**Thickness** : 70 - 80 micron .

**Direct impact** : min. 30 Nm ( ISO 6272 )

**Erichsen embossing ( ISO 1520 )** : min. 4 mm

**Cylindrical mandrel ( ISO 1519/73 )** : pass 3/16" = 5 mm

**Adhesion ( ISO 2409 )** : GT 0/1

**Buchholz hardness ( ISO 2815 )** : min. 85

**Pencil hardness ( ASTM D3363 )** : H - 2H

**CORROSION  
AND DURABILITY**

**Test conditions** : trials are made on normalized UNI 5961 panels 0,6 mm thick ,  
treated by microcrystalline zinc salts phosphatization , or on AA 5005-H24  
chromatated aluminium panels , coated with 70 - 80 micron of  
powder completely cured .

Mentioned results are obtained under controlled lab conditions ; therefore  
these values are merely indicative and must be confirmed in the actual use  
conditions under the responsibility of each single user .

**Salt spray test ( ISO 3768 / ASTM B117 )**

Support UNI 5961 steel treated by zinc phosphate

After 1000 hours rust penetration at the cross-hatch : max. 4 mm

**Saline-acetic spray test ( ISO 9227 )**

Support UNI 5961 steel treated by zinc phosphate

After 1000 hours rust penetration at the cross-hatch : max. 16 mm

**Humidostatic test ( ISO 6270 )**

Support UNI 5961 steel treated by zinc phosphate

After 1000 hours no film variation

**Exposure in sulphur dioxide according " Kesternich test " ( ISO 3231 )**

After 24 hours no blistering , no colour variation , no gloss variation

**Accelerated weathering ( EN ISO 11341 )**

After 1000 hours of test the gloss retention is higher than 50%

of starting value and colour variation fulfills Qualicoat specifications

**Exterior durability**

After 12 months of exposure in Florida the gloss retention is higher than 50%

of starting value and colour variation fulfills Qualicoat specifications

**Chemical resistances at room temperature ( 25+/-3°C )**

Generally good versus diluted acids and diluted alkalis

Sufficient versus aromatics , moderate versus ketons and alogenated

The behaviour versus very aggressive or concentrated agents or under

different conditions must be verified by the user

**SELAC HOMOLOGATED POLYESTERS FOR ARCHITECTURAL  
SERIES : Y51 Y52 Y54 Y57 in ANTHERM version**  
Glossy - Semiglossy - Matt - Metallic and tridimensional effect

**STORAGE AND STABILITY**

Products must be stored in the original sealed packagings , in a cool and dry place and at a temperature not exceeding 30°C .

In these conditions products **SELAC polyesters** are stable for a period of 36 months .

Matt versions Y54 are stable for a period of 12 months .

Always consult the specific TDS of each single product or contact arsonsisi s.p.a.

**RECOMMENDATIONS**

These informations are given on the base of our best experience as well as the one of specialized laboratories and they are continuously updated , nevertheless the user has the complete responsibility to apply and to experiment the products according its own specific necessities .

This document has the intention to describe and summarize the main properties of arsonsisi products , but in no case it can be considered as a warranty for them .

Further informations about application of metallic effects , maintenance of goods coated with homologated polyesters or availability of special versions are mentioned in specific technical integrative notes .